



HAM-LET VENT PROTECTOR FITTINGS



DESCRIPTION

Vent Protector Fitting (VEP) are used to protect tube outlets and instruments exposed to atmospheric pressure.

CLEANING & PACKAGING

Every VEP is cleaned in accordance with Standard Cleaning and Packaging (procedure 8184).

TESTING

The VEP design has been tested for Proof, Burst and Leakage. Every VEP is factory tested for proper assembly.

MATERIALS OF CONSTRUCTION

No.	Components	Qty	Material
1	Vent Fitting Filter Body	1	SST 316
2	Vent Fitting Filter Grid 40 Mesh	1	SST 316
3	Spring Clip 20 DIN472	1	SST

METHOD OF OPERATION

The end of the fitting has a filter screen of 40 mesh, made of 316 St.St. This screen prevents foreign objects, such as insects, from entering the system and causing damage.


This fitting is available in 316 SS in sizes from 1/8" to 1".

The threads are NPT, BSPT or others, according to request.

STANDARD CONFIGURATION DIMENSIONS

Description	T Thread	L		L1		D Min Opening		F	
		in	mm	in	mm	in	mm	in	mm
VEP-SS-N-1/8	1/8	0.56	14.22	0.38	9.65	0.19	4.82	1/2	12.7
VEP-SS-N-1/4	1/4	0.78	19.81	0.56	14.22	0.28	7.11	9/16	14.3
VEP-SS-N-1/2	1/2	1.03	26.16	0.75	19.05	0.50	12.7	7/8	22.2
VEP-SS-N-3/8	3/8	0.81	20.57	0.56	14.22	0.41	10.41	11/16	17.5
VEP-SS-N-3/4	3/4	1.06	26.92	0.75	19.05	0.72	18.28	1-1/16	27.0
VEP-SS-N-1"	1	1.34	34.03	0.94	23.87	0.88	22.35	1-3/8	34.9

ORDERING INFORMATION

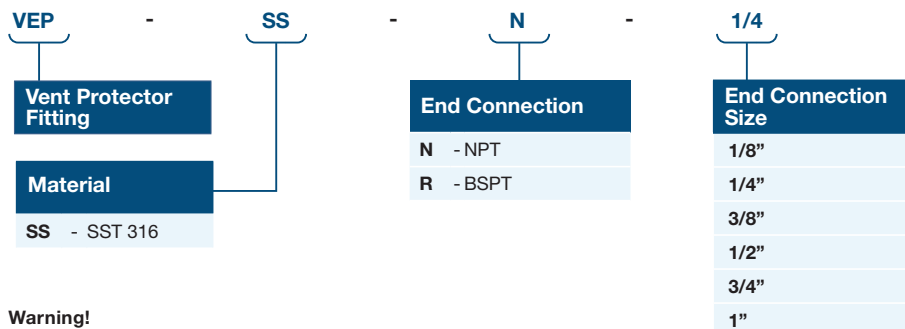

Warning!

The system designer and user have the sole responsibility for selecting products suitable for their special application requirements, ensuring their safe and trouble-free installation, operation, and maintenance. Application details, material compatibility and product ratings should all be considered for each selected product. Improper selection, installation or use of products can cause property damage or personal injury.